



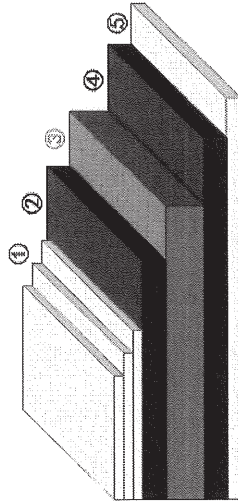


高松黄底社会卡用纸技术规范 Technical specification of GC2

- ① 面层涂布
Top Coating
干食品包装、巧克力、化妆品、彩盒、工具包装等
- ② 漂白硫酸盐浆
Bleached Sulphate Pulp
印刷适性：平滑度高、平整性好、白度高
- ③ 漂白化学机械浆
BCTMP
End Uses: Dry food packaging, packaging for chocolate, cosmetics, gift box, tools etc.
- ④ 漂白硫酸盐浆
Bleached Sulphate Pulp
Printability : High smoothness, good flatness, high whiteness
- ⑤ 底层淀粉
Bottom Starch

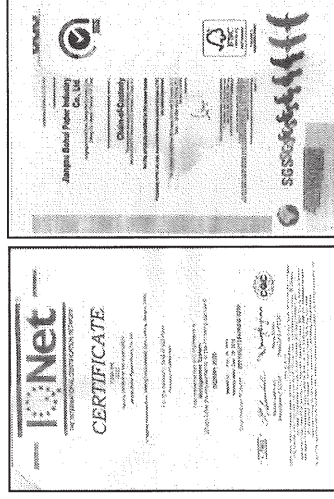

检测项目 Items	单位 Unit	标准 Standards	控制范围 Tolerance	标准基准 Standard Substance																									
				210	230	250	270	300	330	350	390	430	490	555	590	16.9	19.3	21.9	23.2	9	11	15	22	30	35	44	5	5.5	7.5
定量 Grammage	g/m ²	ISO536	±3%	Top: 40; Back: 40																									
厚度 thickness	um	ISO534	±15	1.8																									
	PT	USA	±0.6	1.3																									
挺度 Stiffness	MD	ISO2493	±15%	150																									
	CD			90.0																									
表面粗糙度 Surface roughness PPS10	um	ISO8791	≤	79.0																									
	表面强度 Surface strength	ISO3783	≥	40.0																									
层间结合 Ply bond	J/m ²	TAPPI T833	≥	7.0																									
	白度 Brightness (ISO)	ISO2470	±3																										
光泽度 Gloss75°	TOP																												
	BACK																												
水分 Moisture	Top	TAPPI T480	≥																										
	BACK	GB/T462	±1.0																										

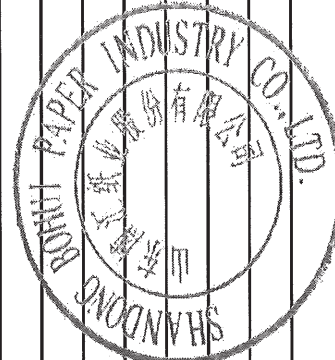

检测条件 Testing Condition :
 温度 Temperature : (23±2) °C
 相对湿度 Relative Humidity : (50±2) %